

Engineered to withstand 35 MPH winds. Included Wind Stabilizer Kit increases tolerance by 5 MPH.
Please consult a licensed professional for in-ground or surface mounting installations.



880ECU - 13' / 4M OCTAGON

- A.** overall height: 110" / 280cm
- B.** clearance: 82" / 208cm
- C.** closed clearance: 30" / 76cm
- D.** overall depth: 163" / 414cm
- MAST:** 3.3" x 5" / 8 x 12.7cm
- WEIGHT:** 126 lbs. / 57 kg.

883ECU-SQ- 10' x 10' / 3M SQUARE

- A.** overall height: 110" / 280cm
- B.** clearance: 82" / 208cm
- C.** closed clearance: 27" / 68cm
- D.** overall depth: 135" / 342cm
- MAST:** 3.3" x 5" / 8 x 12.7cm
- WEIGHT:** 115 lbs. / 52 kg.

Umbrella clearance dimensions are measured while not mounted in a base. Depending on the selected base, these clearance measurements will change. All dimensions have a +/- 5" tolerance based on multiple variables; pin placement height, crank tautness and fabric weight.

Please consult a licensed professional for in-ground or surface mounting installations.

SPECIFIC MOUNTING ECLIPSE® Please see further details on page(s) 54

40Gx3 Max Galvanized Plate Stack

W: 555 lbs./251 kg. **D:** 40"/101cm **H:** 2"/50mm

Free-Standing Base

36G-SQx3 Max Galvanized Plate Stack

W: 600 lbs./272 kg. **D:** 36"/91cm **H:** 2"/50mm

Free-Standing Base

ECU-480 Wheel Base (SHIPS EMPTY)

W: 80 lbs./36 kg. **D:** 36"/91cm **H:** 5"/13cm

Free-Standing Base (Residential Use Only)

NGU550 Galvanized Steel Max

W: 550 lbs./249 kg. **D:** 45"/114cm **H:** 5"/13cm

Free-Standing Base

ECU-DPSurface Mounting Plate

W: 12 lbs./5 kg. **D:** 12.5"/32cm **H:** 5"/12.7mm

Installed Surface Mount

ECU-IG In-Ground Mount

W: 18 lbs./8 kg. **D:** 8"/20cm **H:** 20"/50cm

Installed In-Ground Mount



SPECS

Mast Height: **111"** / 281.9cm
90° Canopy Clearance (at the hub): **84"** / 213.36cm
90° Open Depth (canopy to rear of mast): **131"** / 332.7cm
Canopy Size: **13" Diameter** (3.9m)
Closed Clearance (longest rib): **29"** / 73.6cm
Crank Clearance: **34"** / 86.3cm
Closed Depth: **18"** / 45.7cm
Mast Diameter: **3.3" x 5"** / 8.3 x 12.7cm
Weight: **108 lbs.** / 48.98kg

Single Vent Canopy
Satin Anodized Aluminum Frame Finish

FEATURES

Infinity Tilt 90° - 140°
360° Rotation
90° Locking Position
Wind Stabilizer Bars

SHIPPING SPECS

Eclipse Carton Dimensions:
22" / 55.8cm **w** x **13"** / 33cm **h** x **13.5'** / 4.1m **d**

PALLET SPECS/DIMS: **40"** / 101cm x **115"** / 293cm

A: 112" / 284.4cm

B: 28" / 71cm


C: 13.5' / 4.1m

SHIPPED WEIGHT: 123 lbs. / 55.7kg. (single Windmaster10)

6061 Anodized Extruded Aluminum Alloy

Shipped single on a pallet or up to 4 per pallet.

SHIPPED WEIGHT: 131 lbs. / 59.4kg.

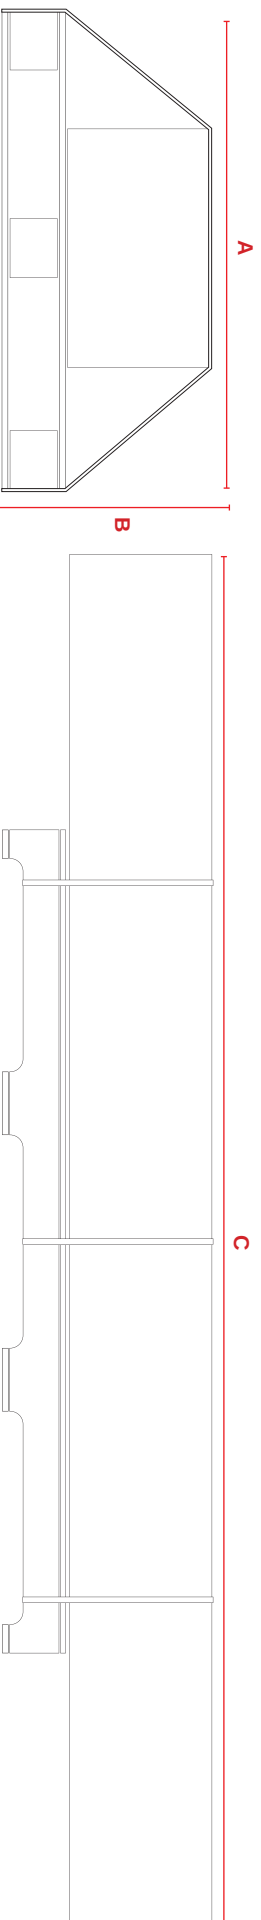

SPECIFIC MOUNTING ***ECLIPSE®***



40Gx3 Max Galvanized Plate Stack

W:555 lbs./252 kg. **D:**40"/101cm **H:**2"/50mm

Triple stack 40G is a require minimum Galvanized plate option for the Eclipse® Cantilever.

NOTE: When stacking plates, bolts will only "bite" to bottom plate. Rotate thread-less holes on additional stacking plates to match threaded holes on bottom plate.



36G-SQx3 Max Galvanized Plate Stack

W:600 lbs./272 kg. **D:**36"/91cm **H:**2"/50mm

Triple stack 36G-SQ is a require minimum Galvanized plate option for the Eclipse® Cantilever.

NOTE: When stacking square plates, there is a dedicated threaded "bottom" plate. Additional top plates will not be threaded. Bolts only bite to bottom plate.



NGU550 Galvanized Steel Max

W:550 lbs./249 kg. **D:**45"/114cm **H:**5"/13cm

Galvanized steel box frame slotted with concrete pavers and matte silver anodized aluminum lid.



MS



ECU-480 Free-Standing Wheel Base

W:80 lbs./36 kg. **D:**36"/91cm **H:**5"/13cm

Galvanized steel box frame slotted for 12 (16x16x2) concrete pavers and matte silver anodized aluminum lid. Locking caster wheels and leveling feet are included. *Pavers are not included.*

**RESIDENTIAL USE ONLY
SHIPS EMPTY**




ECU-DP Surface Mounting Plate

W: 12 lbs./5 kg. **D:** 12.5"/32cm **H:** .5"/12.7mm

Direct surface mounting deck plate. Can be mounted to concrete or wood deck or any stable solid surface.

Please consult a licensed professional for in-ground or surface mounting installations.



ECU-IG In-Ground Mount

W:18 lbs./8 kg. **D:**8"/20cm **H:**20"/50cm

In-Ground mounting stem for concrete, soil, hard clay.

Please consult a licensed professional for in-ground or surface mounting installations.



MS



SM